



CHENGLI
诚立精密



中国破碎锤专业制造商
Chinese Top Level Hydraulic
Breaker Manufacturer



BRIEF 公司简介 INTRODUCTION

烟台诚立精密机械有限公司，主要从事液压破碎锤的研发、生产和销售。公司积累了丰富的生产破碎锤的经验，工程建设中特别是对混凝土拆除和矿山作业优势更为明显。公司始终把产品质量视为企业的生命，秉承“真挚，求实，发展”的企业理念，以不断为客户创造价值为追求目标，励志打造工程机械市场知名品牌，以过硬的质量和售后服务拓展市场，以品牌求发展，实现与客户的互利共赢。烟台诚立精密机械有限公司愿与您携手共创美好的未来。

Yantai Chengli Precision Machinery Co.,Ltd, mainly engaged in the research and development, production and sales of hydraulic crushing hammer. The company has accumulated rich experience in the production of crushing hammer, the construction of the project, the advantages of concrete demolition and mine operation are more obvious. The company always put the product quality as enterprise life, adhering to the "sincere, pragmatic, development" business philosophy, to continue to create value for the pursuit of goals for customers, create inspirational construction machinery market well-known brands, expanding the market with excellent quality and service, to brand development, to achieve mutual benefit and win-win with customers. Yantai Chengli Precision Machinery Co.,Ltd is willing to join hands with you to create a better future.

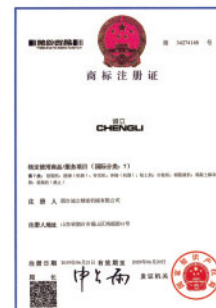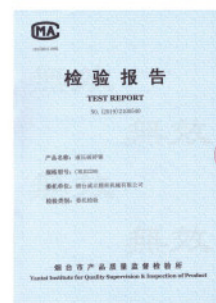

公司文化 CULTURE

诚立精神：持之以恒，精益求精，不断超越

诚立愿景：成为领先的挖掘机属具制造商

诚立目标：成为一流的液压破碎锤制造商

经营理念：诚信为本，创新为魂

质量方针：一丝不苟、精益求精，为顾客提供优质的产品和满意的服务，使企业的质量管理体系得到持续改进。

服务理念：客户至上，用心服务

CHLB Spirit: Perseverance, excellence, and constantly transcend

CHLB Vision: To be the world's leading excavator attachment manufacturer

CHLB Goal: To be the world class hydraulic breaker manufacturer

Business Philosophy: Honesty, innovation as the soul

Quality Policy: Meticulous, excellence, to provide customers with quality products and satisfactory service, make the enterprise quality management system continuously improved.

Service Concept: Customer first, intentions services



印尼建筑工程机械展
Construction Indonesia 2019.09



越南VIIF展会
Viif Vietnam 2018.10



北京工程机械展
Bices Beijing 2019.09



广州康马展
Conmart Guangzhou 2019.08



俄罗斯莫斯科宝马展
Bauma Russia 2019.06



上海宝马展
Bauma Shanghai 2018.12



印度宝马展
Bauma India 2018.12



中国破碎锤专业制造商
Chinese Top Level Hydraulic Breaker Manufacturer

香蕉型破碎锤
BACKHOE TYPE
HYDRAULIC BREAKER



滑移破碎锤
SIDE LOADER TYPE
HYDRAULIC BREAKER

液压打桩锤
HYDRAULIC
PILE HAMMER



CHENGLI

三角型破碎锤
SIDE TYPE HYDRAULIC BREAKER

- 产品特点
- 容易控制，定位方便
- 持久耐用，工作效率高
- 打击力强，使用寿命超长
- 操作性能稳定，售后服务便捷

CHARACTERISTIC

Easy to control and convenient to position

Durable and durable, and high working efficiency

High impact force and long service life

The operation performance is stable and after-sales service is convenient




			内置阀型（不带蓄能器）Inward Valve type without accumulator											内置阀型(带蓄能器)		
			小型液压破碎锤范围 Small Range						中型液压破碎锤范围 Medium Range							
型号	Model	Unit	CHLB100	CHLB200	CHLB300	CHLB350	CHLB400	CHLB430	CHLB450	CHLB800	CHLB1600	CHLB2000	CHLB2200	CHLB2200A	CHLB3000	
适配挖机	Suitable Excavator	ton	0.8-2.5	1.2-3.0	2.5-4.5	3.0-5.5	4-7	6-9	7-14	10-15	15-18	18-26	18-26	18-26	25-30	
总重量	Operating Weight	kg	77	99	132	198	275	418	561	842	1381	1609	1950	1950	2359	
液压油流量	Required Oil Flow	l/min	15-30	20-40	25-50	30-60	40-70	50-90	60-100	80-110	90-120	100-150	120-180	120-180	150-210	
设定压力	Setting Pressure	bar	150	150	150	150	170	180	190	200	210	210-230	210-230	210-230	240-250	
液压油压力	Operating pressure	bar	90-120	90-120	90-120	100-130	110-140	120-150	130-160	150-170	150-170	160-180	160-180	160-180	160-180	
冲击力	Impact Energy	joule	203	271	406	542	677	1017	1355	2033	2711	3423	4067	4067	5423	
打击频率	Impact Rate	bpm	800-1400	700-1200	600-1100	500-1000	500-900	400-800	400-800	350-700	350-650	350-600	350-500	350-500	300-450	
软管直径	Hose Diameter	inch	1/2	1/2	1/2	1/2	1/2	1/2	3/4	3/4	1	1	1	1	1	
声音分贝数	Noise level	dB	106	107	109	117	109	115	112	114	115	120	118	118	120	
钎杆直径	Tool Diameter	mm	40	45	53	60	68	75	85	100	125	135	140	140	150	

Inward valve type with accumulator							外置阀型（带蓄能器）Outward valve type with Accumulator											
大型范围 Large Range				小型范围 Small Range			中型范围 Medium Range		大型范围 Large Range									
CHLB3200	CHLB3500	CHLB3500F	CHLB4500	CHLB400A	CHLB430A	CHLB800A	CHLB1500G	CHLB2000G	CHLB3000G	CHLB4000G	CHLB185	CHLB195	CHLB195P	CHLB200	CHLB205	CHLB210	CHLB220	
28-35	30-40	30-40	35-40	4-7	6-9	10-15	12-18	18-25	25-33	35-45	35-45	40-55	50-55	50-70	50-70	60-80	70-80	
2655	2735	3289	4167	305	448	872	1406	1698	2462	3001	4376	5039	5374	6205	6375	6683	7378	
180-240	200-260	200-260	210-290	40-70	50-90	80-110	115-150	125-160	175-220	200-250	220-290	240-290	260-280	260-300	260-300	300-350	320-350	
240-260	240-260	240-260	260-280	170	180	200	210	210-230	210	210	290-300	300-310	300-310	300-310	300-310	310-330	310-330	
180-200	180-200	180-200	180-200	110-140	120-150	150-170	160-180	160-180	160-180	160-180	220-280	220-280	260-280	220-280	260-280	260-320	280-320	
6779	8812	10846	12202	827	1167	2233	2646	3692	5193	10388	14302	17088	19322	21360	23543	25632	27057	
300-450	250-400	250-350	250-350	500-900	400-800	350-700	350-650	350-600	300-450	300-400	200-250	180-200	160-200	150-200	150-200	150-200	120-180	
1-1/4	1-1/4	1-1/4	1-1/4	½	½	3/4	1	1	1	1-1/4	1-1/4	1-1/4	1-1/4	1-1/4	1-1/4	1-1/4	1-1/4	
123	123	124	125	109	115	114	114	120	120	123	125	125	125	125	125	125	125	
155	165	165	175	68	75	100	120	135	150	160	185	195	195	200	205	210	220	

直角型破碎锤
TOP TYPE HYDRAULIC BREAKER

产品特点
强大的打击力；
卓越的环保性能；
精湛的制造工艺；
保养简易,售后服务快捷。
PRODUCT FEATURES
Strong impact power;
Excellent environmental performance;
Exquisite manufacturing technology;
Easy maintenance, fast after-sales service.

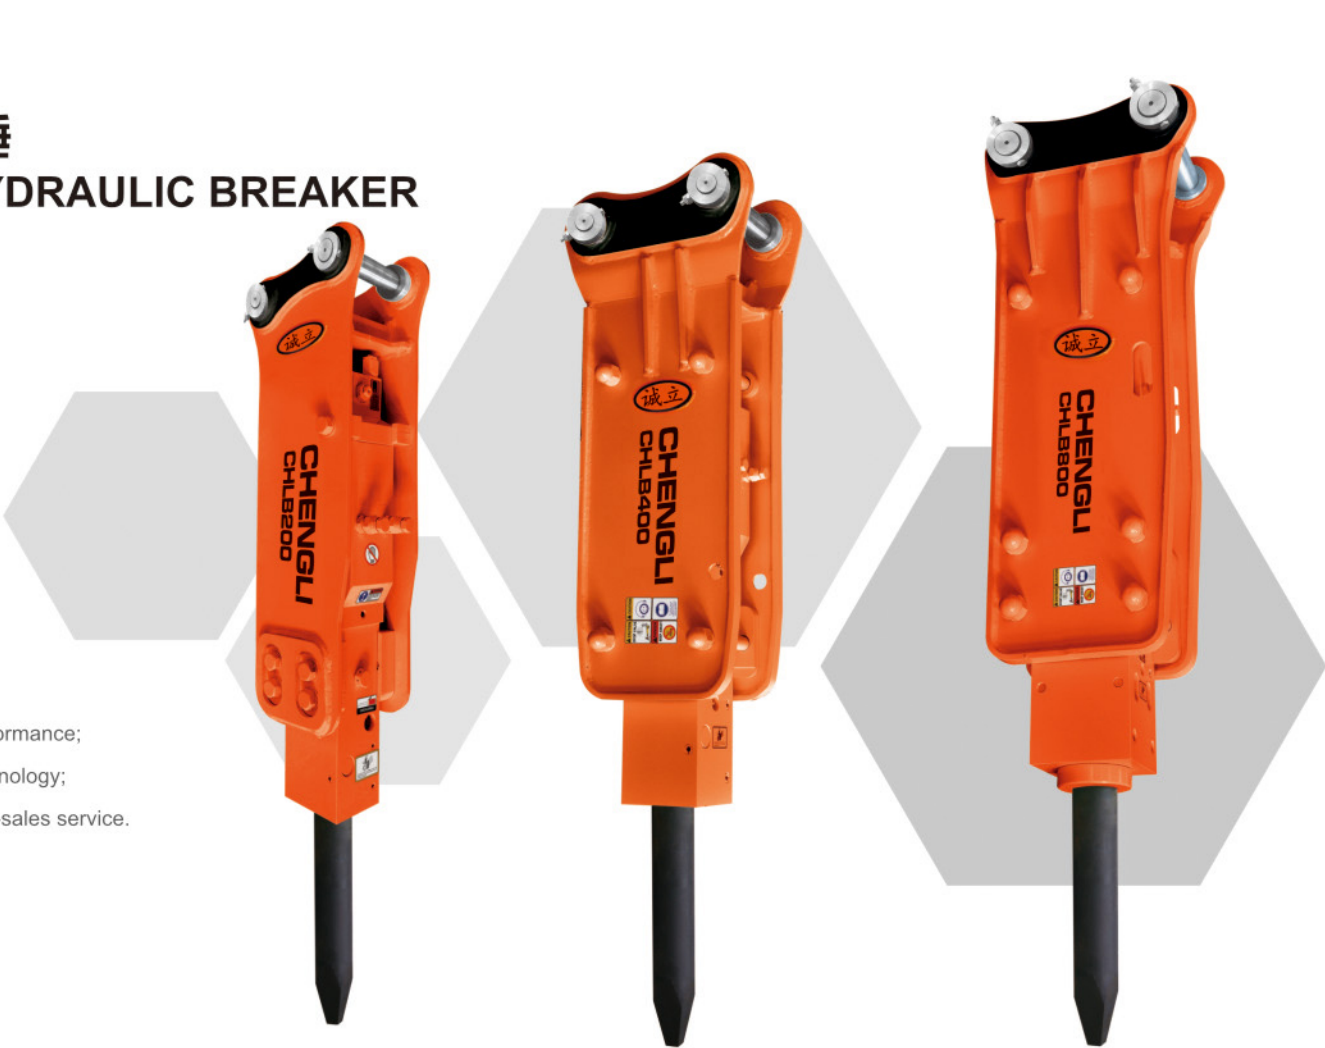

			内置阀型（不带蓄能器）Inward Valve type without accumulator							内置阀型(带蓄能器)					
			小型液压破碎锤范围 Small Range					中型液压破碎锤范围 Medium Range							
型号	Model	Unit	CHLB100	CHLB200	CHLB300	CHLB350	CHLB400	CHLB430	CHLB450	CHLB800	CHLB1600	CHLB2000	CHLB2200	CHLB2200A	CHLB3000
适配挖机	Suitable Excavator	ton	0.8-2.5	1.2-3.0	2.5-4.5	3.0-5.5	4-7	6-9	7-14	10-15	15-18	18-26	18-26	18-26	25-30
总重量	Operating Weight	kg	77	121	148	224	321	407	638	979	1463	1698	2050	2050	2271
液压油流量	Required Oil Flow	l/min	15-30	20-40	25-50	30-60	40-70	50-90	60-100	80-110	90-120	100-150	120-180	120-180	150-210
设定压力	Setting Pressure	bar	150	150	150	150	170	180	190	200	210	210-230	210-230	210-230	240-250
液压油压力	Operating pressure	bar	90-120	90-120	90-120	100-130	110-140	120-150	130-160	150-170	150-170	160-180	160-180	160-180	160-180
冲击力	Impact Energy	joule	203	271	406	542	677	1017	1355	2033	2711	3423	4067	4067	5423
打击频率	Impact Rate	bpm	800-1400	700-1200	600-1100	500-1000	500-900	400-800	400-800	350-700	350-650	350-600	350-500	350-500	300-450
软管直径	Hose Diameter	inch	1/2	1/2	1/2	1/2	1/2	1/2	3/4	3/4	1	1	1	1	1
声音分贝数	Noise level	dB	106	107	109	117	109	115	112	114	115	120	118	118	120
钎杆直径	Tool Diameter	mm	40	45	53	60	68	75	85	100	125	135	140	140	150

Inward valve type with accumulator				外置阀型（带蓄能器）Outward valve type with Accumulator											
大型范围 Large Range				小型范围 Small Range			中型范围 Medium Range		大型范围 Large Range						
CHLB3200	CHLB3500	CHLB3500F	CHLB4500	CHLB400A	CHLB430A	CHLB800A	CHLB1500G	CHLB2000G	CHLB3000G	CHLB4000G	CHLB185	CHLB195	CHLB195P	CHLB200	CHLB205
28-35	30-40	30-40	35-40	4-7	6-9	10-15	12-18	18-25	25-33	35-45	35-45	40-55	50-55	50-70	50-70
3059	3151	3503	4216	351	437	1009	1479	1787	2591	3158	4809	5164	5504	6408	6505
180-240	200-260	200-260	210-290	40-70	50-90	80-110	115-150	125-160	175-220	200-250	220-290	240-290	260-280	260-300	260-300
240-260	240-260	240-260	260-280	170	180	200	210	210-230	210	210	290-300	300-310	300-310	300-310	300-310
180-200	180-200	180-200	180-200	110-140	120-150	150-170	160-180	160-180	160-180	160-180	220-280	220-280	260-280	260-280	260-320
6779	8812	10846	12202	827	1167	2233	2646	3692	5193	10388	14302	17088	19322	21360	23543
300-450	250-400	250-350	250-350	500-900	400-800	350-700	350-650	350-600	300-450	300-400	200-250	180-200	160-200	150-200	150-200
1-1/4	1-1/4	1-1/4	1-1/4	½	½	3/4	1	1	1	1-1/4	1-1/4	1-1/4	1-1/4	1-1/4	1-1/4
123	123	124	125	109	115	114	114	120	120	123	125	125	125	125	125
155	165	165	175	68	75	100	120	135	150	160	185	195	195	200	205

静音型破碎锤

BOX TYPE HYDRAULIC BREAKER

产品特点

领先的热处理技术，增强抗热、抗磨损性能。

在保证油压不变的情况下减小油缸体积，降低燃油消耗，采用自主研发的机芯，使活塞缸体更持久耐用，使用寿命更长。

裸露的夹板采用了高强度钢板，以减小磨损程度。

实现了与挖掘机、装载机最佳功效匹配。

PRODUCT FEATURES

leading heat treatment technology, enhance heat resistance, wear resistance.

Under the condition of keeping the oil pressure constant, the cylinder volume is reduced and the fuel consumption is reduced.

The self-developed core is adopted to make the piston cylinder body more durable and the service life longer.

Exposed decks are made of high-strength steel plates to reduce wear.

The best efficiency matching with excavator and loader is realized.



			内置阀型（不带蓄能器）Inward Valve type without accumulator											内置阀型(带蓄能器)		
			小型液压破碎锤范围 Small Range						中型液压破碎锤范围 Medium Range							
型号	Model	Unit	CHLB100	CHLB200	CHLB300	CHLB350	CHLB400	CHLB430	CHLB450	CHLB800	CHLB1600	CHLB2000	CHLB2200	CHLB2200A	CHLB3000	
适配挖机	Suitable Excavator	ton	0.8-2.5	1.2-3.0	2.5-4.5	3.0-5.5	4-7	6-9	7-14	10-15	15-18	18-26	18-26	18-26	25-30	
总重量	Operating Weight	kg	113	139	168	247	325	413	629	948	1427	1650	1978	1978	2279	
液压油流量	Required Oil Flow	l/min	15-30	20-40	25-50	30-60	40-70	50-90	60-100	80-110	90-120	100-150	120-180	120-180	150-210	
设定压力	Setting Pressure	bar	150	150	150	150	170	180	190	200	210	210-230	210-230	210-230	240-250	
液压油压力	Operating pressure	bar	90-120	90-120	90-120	100-130	110-140	120-150	130-160	150-170	150-170	160-180	160-180	160-180	160-180	
冲击力	Impact Energy	joule	203	271	406	542	677	1017	1355	2033	2711	3423	4067	4067	5423	
打击频率	Impact Rate	bpm	800-1400	700-1200	600-1100	500-1000	500-900	400-800	400-800	350-700	350-650	350-600	350-500	350-500	300-450	
软管直径	Hose Diameter	inch	1/2	1/2	1/2	1/2	1/2	1/2	3/4	3/4	1	1	1	1	1	
声音分贝数	Noise level	dB	106	107	109	117	109	115	112	114	115	120	118	118	120	
钎杆直径	Tool Diameter	mm	40	45	53	60	68	75	85	100	125	135	140	140	150	

Inward valve type with accumulator				外置阀型（带蓄能器）Outward valve type with Accumulator													
大型范围 Large Range		小型范围 Small Range		中型范围 Medium Range		大型范围 Large Range											
CHLB3200	CHLB3500	CHLB3500F	CHLB4500	CHLB400A	CHLB430A	CHLB800A	CHLB1500G	CHLB2000G	CHLB3000G	CHLB4000G	CHLB185	CHLB195	CHLB195P	CHLB200	CHLB205	CHLB210	CHLB220
28-35	30-40	30-40	35-40	4-7	6-9	10-15	12-18	18-25	25-33	35-45	35-45	40-55	50-55	50-70	50-70	60-80	70-80
2896	2983	3399	4390	355	443	978	1463	1766	2519	3076	/	/	/	/	/	/	/
180-240	200-260	200-260	210-290	40-70	50-90	80-110	115-150	125-160	175-220	200-250	220-290	240-290	260-280	260-300	260-300	300-350	320-350
240-260	240-260	240-260	260-280	170	180	200	210	210-230	210	210	290-300	300-310	300-310	300-310	300-310	310-330	310-330
180-200	180-200	180-200	180-200	110-140	120-150	150-170	160-180	160-180	160-180	160-180	220-280	220-280	260-280	220-280	260-280	260-320	280-320
6779	8812	10846	12202	827	1167	2233	2646	3692	5193	10388	14302	17088	19322	21360	23543	25632	27057
300-450	250-400	250-350	250-350	500-900	400-800	350-700	350-650	350-600	300-450	300-400	200-250	180-200	160-200	150-200	150-200	150-200	120-180
1-1/4	1-1/4	1-1/4	1-1/4	½	½	3/4	1	1	1	1-1/4	1-1/4	1-1/4	1-1/4	1-1/4	1-1/4	1-1/4	1-1/4
123	123	124	125	109	115	114	114	120	120	123	125	125	125	125	125	125	125
155	165	165	175	68	75	100	120	135	150	160	185	195	195	200	205	210	220



中国破碎锤专业制造商
Chinese Top Level Hydraulic Breaker Manufacturer

CHENGLI